

# MODELING OF SEQUENT DEPTH RATIO FOR HYDRAULIC JUMP UNDER SLUICE GATE USING BAFFLE BLOCK AND SILL

*by Sunik Sunik*

---

**Submission date:** 28-Mar-2023 11:30PM (UTC-0400)

**Submission ID:** 2049653211

**File name:** 5a\_Modelling\_SDR\_Sunik\_Geomate.docx (379.75K)

**Word count:** 2376

**Character count:** 11871

## MODELING OF SEQUENT DEPTH RATIO FOR HYDRAULIC JUMP UNDER SLUICE GATE USING BAFFLE BLOCK AND SILL

\*Sunik<sup>1</sup>, Rispingtati<sup>2</sup> Very Dermawan<sup>3</sup> Widandi Soetopo<sup>4</sup> Lily Montarcih Limantara<sup>5</sup>

<sup>1</sup>Faculty of Engineering, Department of Civil Engineering, Widya Karya Catholic University, Indonesia;  
<sup>2,3,4,5</sup> Faculty of Engineering, Department of Water Resources Engineering, Brawijaya University, Indonesia

\*Corresponding Author, Received: 02 Sept. 2018, Revised: 07 Oct. 2018, Accepted: 10 Dec. 2018

**ABSTRACT:** The sequent depth ratio as one variable of hydraulic jump characteristics under sluice gate were studied experimentally using different configurations simulation of baffle block and sill. Experimental research used fiberglass prototype model as horizontal channel, width (B) = 50 cm, length (L) = 9 m and using sluice gate installed on it, width (b) = 50 cm, thick (t) = 1 cm, height (h) = 80 cm. Two models combination of baffle block as cubic (code K, 43 running) and trapezoidal (code T, 72 running) with different dimension installed as three row, specified location 25 cm after sluice gate. During each running test with variation open gate (a = 1,2,3,4 cm), variation type of baffle block (K1, K2, K3; T1, T2, T3, T4), the sequent depth, velocity distribution and Froude number were measured and analyzed. The result showed that the modeling of sequent depth ratio in term of the initial Froude number gives the better performance for cubic baffle block (K3, sill 2 cm and 2.7 cm, Fr = 0.16 - 0.39) with R<sup>2</sup> = 0.9945 and trapezoidal baffle block (T4, sill 3.6 cm, Fr = 0.26 - 0.52) with R<sup>2</sup> = 0.9973. It concluded that using three rows configuration of baffle block (cubic and trapezoidal baffle block) with value of blockage ratio as 50% was appropriate with USBR standard that value blockage ratio “ $\eta$ ” do not exceed 0.5 (depend on the width of the block (Wb), spacing between adjacent blocks (S) and the number of baffle blocks).

*Keywords: Baffle block, Hydraulic Jump, Froude Number, Blockage Ratio, Sequent Depth.*

### 1. INTRODUCTION

Sluice gate as one of infrastructure component that usually installation in a channel while operated with certain open gate will raise a hydraulic jump. Hydraulic jump always became flow phenomenon that occurs under the gate. The hydraulic jump was a transition condition from the supercritical flow that will be converted to subcritical flow [1]. To reduce the hydraulic jump conditions or to reach the stable condition usually, it used the additional structure as baffle block that placed in front of the gate with a certain distance to stabilize the jump [9] or using sill [1] that placed at the lower end of the channel (tailwater/downstream depth). Baffle block has an impact on velocity and energy reduction when a hydraulic jump occurs. Sill has an impact on increasing the water level at the downstream end of the channel and causing backwater [14]. Transferring kinetic energy into potential energy occurs while the rapid change in flow considerable by energy dissipation and turbulence [2]. The depth before the jump was called the initial depth ( $y_1$ ) and after the jump was called the sequent depth ( $y_2$ ).

Sequent depth ratio ( $y_2/y_1$ ) was one of hydraulic jump characteristic beside other as length of jump ratio ( $L_j/y_1$ ), roller length ratio

( $L_r/y_1$ ) and energy dissipation ratio ( $\Delta E/E_1$ ). Belanger [3]-[7] presented the sequent depth ratio ( $y_2/y_1$ ) and can be written as:

$$\frac{y_2}{y_1} = \frac{1}{2} \times (\sqrt{1 + 8F_1^2} - 1) \quad (1)$$

where:  $y_1$  and  $y_2$  refer to upstream and downstream of flow,  $F_1$ =upstream Froude number,  $g$ =gravitational acceleration ( $m/s^2$ ). Horizontal bed slope will reduced sequent depth ratio [10], [11], [13].

The cubic baffle block generally stated as an effective device while trapezoidal baffle block usually more preferable with respect to width, height, position, and spacing on the channel [8]. United States Department of the Interior Bureau of Reclamation (USBR) recommended that function of block height to determine dimensions and shape of baffle block base on the width and upper longitudinal dimension [8] and it will rise blockage ratio [12]. Blockage ratio present as:

$$\eta = \frac{\sum Wb}{\sum (Wb+S)} \quad (2)$$

where S = clear spacing between the adjacent blocks, Wb = width of the block.

This research aims to analyze modeling of sequential depth ratio between trapezoidal and

cubic baffle block that located in front of sluice gate in a channel using prototype model channel test.

## 2. EXPERIMENTAL WORK

The experimental work for this research has been done in the Laboratory of River Engineering, Water Resource Department, Engineering Faculty, Brawijaya University, Malang, Jawa Timur, Indonesia.


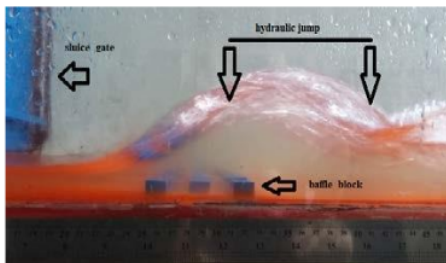
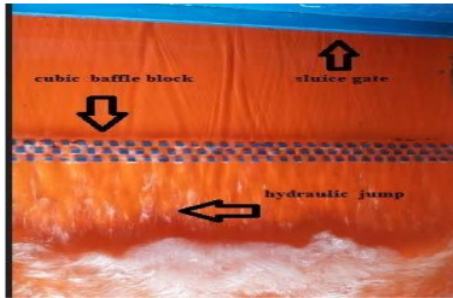


Fig 1. Model prototype, baffle block configuration

and a sketch of hydraulic jump (source: primary data)

Table 1 Configuration dimension of cubic and trapezoidal baffle block

No	Model Baffle Block	Type	Run	(b <sub>b</sub> ) mm	(l <sub>b</sub> ) mm	(h <sub>b</sub> ) mm
1	K	K1	19	7	7	7
		K2	16	14	14	14
		K3	8	21	21	21
2	T	T1	12	7	7	7
		T2	12	14	14	14
		T3	8	21	21	21
		T4A	10	28	28	28
		T4B	10	28	28	28
		T4C	10	28	28	28
		T4D	10	28	28	28

Table 2 Configuration dimension of sill for the channel

No	Model Baffle Block	Type	Sill type	(h <sub>s</sub> ) (cm)
1	K	K1	s <sub>1,s2,s3</sub>	no sill; 2 and 2.7
		K2	s <sub>2,s3</sub>	2 and 2.7
		K3	s <sub>2,s4</sub>	2 and 2.7
2	T	T1	s <sub>1,s3</sub>	no sill; 2.7
		T2	s <sub>1,s2,s3</sub>	no sill; 2 and 2.7
		T3	s <sub>2,s3</sub>	2 and 2.7
		T4A	s <sub>4</sub>	1.5
		T4B	s <sub>2</sub>	2
		T4C	s <sub>3</sub>	2.7
		T4D	s <sub>5</sub>	3.6

Source: primary data

The model prototype that used to running flow as horizontal channel made from fiberglass, width (B) = 50 cm, length (L) = 9 m, with sluice gate

placed on it, width (b) = 50 cm, thick (t) = 1 cm, height (h) = 80 cm, using added device (baffle block and sill) as energy dissipator, present in Figure 1.

Configuration dimension of cubic (K) and trapezoidal (T) baffle block as type of K1, width ( $b_{b1}$ ) = 7 mm, length ( $l_{b1}$ ) = 7 mm and height ( $h_{b1}$ ) = 7 mm; type of K2, width ( $b_{b2}$ ) = 14 mm, length ( $l_{b2}$ ) = 14 mm and height ( $h_{b2}$ ) = 14 mm, type of K3, width ( $b_{b3}$ ) = 21 mm, length ( $l_{b3}$ ) = 21 mm and height ( $h_{b3}$ ) = 21 mm; type of T1, width ( $b_{b4}$ ) = 7 mm, length ( $l_{b4}$ ) = 7 mm, height ( $h_{b4}$ ) = 7 mm; type of T2, width ( $b_{b5}$ ) = 14 mm, length ( $l_{b5}$ ) = 14 mm, height ( $h_{b5}$ ) = 14 mm; type of T3, width ( $b_{b6}$ ) = 21 mm, length ( $l_{b6}$ ) = 21 mm, height ( $h_{b6}$ ) = 21 mm; type of T4A-T4B-T4C-T4D, width ( $b_{b7}$ ) = 28 mm, length ( $l_{b7}$ ) = 28 mm, height ( $h_{b7}$ ) = 28 mm; Sill placed in downstream channel with dimension width ( $b_{s1}$ ) = 50 cm, length ( $l_s$ ) = 1 cm, height ( $h_{s1}$ ,  $h_{s2}$ ,  $h_{s3}$ ,  $h_{s4}$ ,  $h_{s5}$  = no sill, 2 cm, 2.7 cm, 1.5 cm and 3.6 cm. Variation of open gate (a) = 1 cm, 2 cm, 3 cm, 4 cm).

Ten sets of experiments test present in Table 1 was performed with a total of 115 runs, using cubic and trapezoidal in the cross-sectional shape of baffle blocks (three rows, each baffle block made from fiberglass) mixing with the configuration of sill that placed in downstream as present in Table 2. In each run present in Figure 2, simulation of flow was trial till configuration of the hydraulic jump was perform in stabilized to the desired location of 25 cm downstream from the sluice gate. The depth (y) measured was done in 12 section of flow (1-upstream, 2-under the gate, 3- before baffle block installation, 4-before the jump (the initial depth,  $y_1$ ), 5-above the baffle block, 6- the end baffle block, 7- after the jump (sequent depth,  $y_2$ ), 8-end of roller, 9-end of jump, 10-3/4 length before the sill, 11-1/2 length before the sill, 12-1/4 near the sill). Each section measured in left, middle and right part that each part measure in above, middle and bottom of height flow (one section consist of nine measured). The local velocity (v) for 12 section was measured in the same procedure. Value of velocity and the depth will rise the Froude number ( $Fr_1$ ).

The relation between Froude number,  $Fr_1$  and sequent depth  $y_2/y_1$  was analyzed using regression method [15] to know the influence of  $Fr_1$  against to  $y_2/y_1$ . Determination coefficient value was criteria that showed the variable against the response [16] as:

$$R^2 = 1 - (\Sigma JKG / \Sigma JKT) \quad (3)$$

where:

$\Sigma JKG$  = sum of error square

$\Sigma JKT$  = total sum of squares

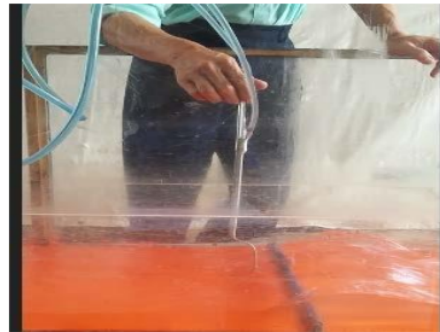


Fig 2. Experiment test measurement in 12 section (source: primary data)

### 3. RESULTS

#### 3.1 Blockage Ratio

This research result shows that the value of the blockage ratio for all type block was 50% present

in Table 3.

Table 3 Blockage ratio value

Type	Wb	S	Number of Blocks	$\eta$
Baffle	(mm)	(mm)	Blocks	%
K1	7	7	35	50
K2	14	14	17	50
K3	21	21	11	50
T1	7	7	35	50
T2	14	14	17	50
T3	21	21	11	50
T4	28	28	8	50

Source: primary data and analysis

### 3.2 Sequent Depth Ratio

Sequent depth analysis for cubic and trapezoidal baffle block (115 runs) show in Figure 3 – Figure 5.

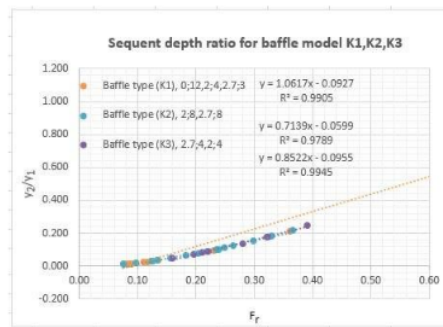


Fig.3 Sequent depth ratio for cubic baffle block model K1,K2,K3 (source: analysis data)

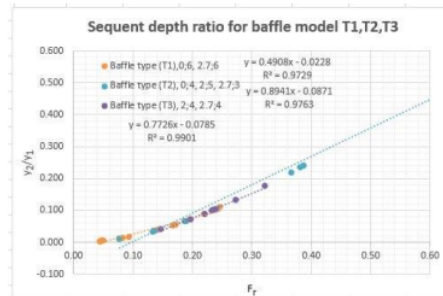


Fig.4 Sequent depth ratio for trapezoidal baffle block model T1,T2,T3 (source: analysis data)

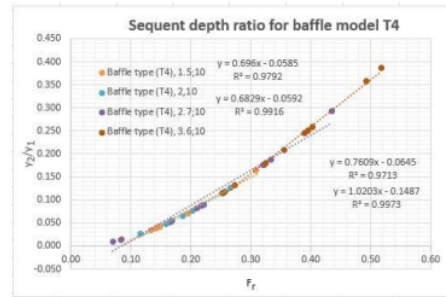


Fig.5 Sequent depth ratio for trapezoidal baffle block model T4 (source: analysis data)

## 4. DISCUSSION

### 4.1 Blockage Ratio

Blockage ratio value analysis depends on the width of the block (Wb) and spacing between adjacent blocks (S). Other, the value affected by a number of baffle blocks. USBR recommended that value blockage ratio “ $\eta$ ” do not exceed 0.5 [12]. Value blockage ratio for this research (K1, K2, K3, T1, T2, T3, T4) was 50%. It can be concluded that the configuration of baffle block for this research comply the USBR standard for blockage ratio value.

### 4.2 Sequent Depth Ratio

Recapitulation of modeling sequent depth ratio equation (ten equation) and  $R^2$  value can be seen in Table 4.

Table 4 Modelling of sequent depth ratio equation

No	Type Baffle	Equation	$R^2$
1	K1	$y = 1.0617 x - 0.0927$	0.9905
	K2	$y = 0.7139 x - 0.0599$	0.9789
	K3	$y = 0.8522 x - 0.0955$	0.9945
2	T1	$y = 0.4908 x - 0.0228$	0.9729
	T2	$y = 0.8941 x - 0.0871$	0.9763
	T3	$y = 0.7726 x - 0.0785$	0.9901
2	T4A	$y = 0.696 x - 0.0585$	0.9792
	T4B	$y = 0.6829 x - 0.0592$	0.9916
	T4C	$y = 0.7609 x - 0.0645$	0.9713
	T4D	$y = 1.0203 x - 0.1487$	0.9973

Source: analysis data

Based on  $R^2$  value, the better performance showed by cubic baffle block (type baffle of K3, used sill 2 cm and 2.7 cm,  $Fr = 0.16 - 0.39$ ) and  $R^2 = 0.9945$  show by trapezoidal baffle block (type baffle of T4, sill 3.6 cm,  $Fr = 0.26 - 0.52$ ) with  $R^2 = 0.9973$ , so the equation represent as:

$$\text{Cubic, } y_2/y_1 = 0.8522 Fr_1 - 0.0955$$

$$\text{Trapezoidal, } y_2/y_1 = 1.0203 Fr_1 - 0.1487$$

All  $R^2$  value range in  $0.97 - 0.99$  almost to 1 value for determination coefficient. It means that there is a strong relation between value  $Fr_1$  to sequent depth ratio (value of  $Fr_1$  affected the sequent depth ratio value, while  $Fr_1$  depend on velocity ( $v$ ) and depth of water ( $y_1$ ))

## 5. CONCLUSION

The configuration of baffle block for research should be referred to comply the USBR standard for blockage ratio value while USBR standard that value blockage ratio " $\eta$ " do not exceed 0.5 (depend on the width of the block ( $W_b$ ), the spacing between adjacent blocks ( $S$ ) and a number of baffle blocks).

Trapezoidal baffle block gave determination coefficient value ( $R^2 = 0.9973$ ) better than cubic baffle block. It represents sequent depth ratio against to Froude number value that depends on to sill dimension and distance between the block.

## 6. ACKNOWLEDGMENTS

The author would like to thank Prof. Dr. Ir.Lily Montarich Limantara, M.Sc as a mentor, Dr.Ir Rispiningtati, M.Eng as a promotor, Dr. Very Dermawan, ST.,MT. and Dr. Ir. Widandi Soetopo, M.Eng. as co-promotor and the Ministry of Research Technology and the Higher Education Republic of Indonesia for funding this research through BPPDN scholarship.

## 7. REFERENCES

- [1] K.G. Ranga Raju, M.K. Kitaal, M.S.Verma & V.R. Ganeshan., Analysis of Flow Over Baffle Blocks and End Sills. Journal of Hydraulic Research, Vol. 18, Issue 3, 1980, pp. 227-241.
- [2] Sanjeev Kumar Gupta, R. C. M (Peterka, 1984) (Belanger J. , Notes sure l'hydraulique (Notes on Hydraulic Engineering), 1841) ehtab, V. K. Dwivedi., Modeling of Relative
- [3] length and Relative Energy Loss of Free Hydraulic Jump in Horizontal Prismatic Channel. Procedia Engineering, Vol. 51, 2013, pp. 529-537.
- [3] J.B. Bélanger. Essai sur la solution numérique de quelques problèmes relatives a movement permanent des eaux courantes (Essay on the numerical solution of some problems relative to the steady flow of water). Carilian-Goeury, Paris (in French).1828.
- [4] J.B. Bélanger.. "Notes sur l'hydraulique (Notes on Hydraulic Engineering)." Ecole Royale des Ponts et Chaussées, Paris, France, session 1841-1842, 1841, 223 pages (in French).
- [5] J.B. Bélanger. Notes sur le cours d,hydraulique (Notes on a course in hydraulics)." Mém. Ecole Nat. Ponts et Chaussées, Paris, France, session 1849-1850, 1849, 222 pages (in French).
- [6] Hubert Chanson. Jean-Baptiste Charles Joseph BÉLANGER (1790-1874), the Backwater Equation and the Bélanger Equation. Hydraulic Model Report CHSeries, CH69/08. 2008.Civil Engineering, The University of Queensland
- [7] Hubert Chanson. Development of the Bélanger Equation and Backwater Equation by Jean-Baptiste Bélanger (1828). Journal of Hydraulic Engineering. ASCE. 2009.
- [8] A.J. Peterka. Hydraulic Design of Stilling Basins and Energy Dissipators. A Water Resources Technical Publication. Engineering Monograph No. 95. Eight Edition. 1984. United States Department of the Interior Bureau of Reclamation (USBR).
- [9] M. Hanif Chaudhry. Open Channel Flow, Second Edition. 2008. University of South Carolina, Springer.
- [10] S. Mohyeddin. Bateni, F.Yazdandoost. Hydraulics of B-F and F Jumps in Adverse Slope Stilling Basin. Proceedings of the Institution of Civil Engineers, Water Management 162, Issue WM5, 2009. pp 321-327.
- [11] Beirami M.K, Chamani MR. Hydraulic Jump in Sloping Channels: Roller Length and Energy Loss. Canadian Journal of Civil Engineering. Vol. 37. Number 4: 2010, pp. 535-543
- [12] Jaafar S. Maatooq, Enass R. Taleb. The Effect of Baffle Block Locations and Blockage Ratio on the Sequent Depth and Velocity Distribution of Forced Hydraulic Jump. 7<sup>th</sup> International Symposium on Hydraulic

- Structures. 2018.
- [13] Ali Abbas, Haider Alwash, Ali Mahmood. Effect of Baffle Block Configurations on Characteristic of Hydraulic Jump in Adverse Stilling B (Jaafar S. Maaatog, 2018)asin. MATEC Web of Conferences 162, 03005, 2018.
- [14] Youngkyu Kim, Gyewoon Choi, Hyoseon Park, and Seongjoon Byen. Hydraulic Jump and Energy Dissipation with Sluice Gate. Water Journal. 2015. pp.5115-5133.
- [15] Nawari. Regression Analysis using MS Excel 2007 and SPSS 17. 2010. PT Elex Media Komputindo. Jakarta.
- [16] Sembiring. Regression Analysis. 1995. ITB, Bandung.

---

Copyright © Int. J. of GEOMATE. All rights reserved, including the making of copies unless permission is obtained from the copyright proprietors.

---

# MODELING OF SEQUENT DEPTH RATIO FOR HYDRAULIC JUMP UNDER SLUICE GATE USING BAFFLE BLOCK AND SILL

---

## ORIGINALITY REPORT

---

**26%**

SIMILARITY INDEX

**22%**

INTERNET SOURCES

**19%**

PUBLICATIONS

**16%**

STUDENT PAPERS

---

## MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

---

6%

★ [espace.library.uq.edu.au](http://espace.library.uq.edu.au)

Internet Source

---

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off