

Influence of Baffle Block and Sill for Determination Characteristic of Contraction Coefficient (C_c) and Discharge Coefficient (C_d) for Flow Under Sluice Gate

SUNIK SUNIK¹, RISPININGTATI², VERY DERMAWAN³ AND WIDANDI SOETOPO⁴

¹Doctoral Program on Faculty of Engineering, University of Brawijaya, Indonesia

^{2,3,4}Department of Water Resources, Faculty of Engineering, University of Brawijaya, Indonesia

ABSTRACT

The contraction coefficient (C_c) and discharge coefficient (C_d) always rise in flow while sluice gate operated with variation of open gate and discharge (Q). To know it, laboratory experiment was development used trapezoid baffle block compared with sill. This experimental research used prototype model made from fiberglass (horizontal channel), sluice gate installed on it. Dimension of horizontal fiberglass channel: length (L) = 9 m, width (B) = 50 cm; sluice gate dimension, height (h) = 80 cm, thick (t) = 1 cm, width (b) = 50 cm. Variation of discharge (Q) and open gate ($a = 1, 2, 3, 4$ cm). Two models of trapezoid baffle block ($T1$, $T2$) installed as three rows, specified location 25 cm after sluice gate combine with sill (different dimension). Water depth (h) and velocity (v) were measured during each running test then Froude number, contraction coefficient (C_c) and discharge coefficient (C_d) were calculated. The result showed that trapezoid baffle block model $T2$ (used no sill, sill 2 cm and sill 2.7 cm, $Fr = 0.11 - 0.75$) gives the better performance modelling of C_c and C_d in term of the initial Froude number with $R^2 = 0.8086$ (C_c) and $R^2 = 0.8273$ (C_d). It was concluded that using three rows configuration of trapezoid baffle block, $T2$ model gave better model than $T1$.

Keyword : Trapezoid Baffle Block, Sill, Contraction coefficient, Discharge coefficient, Froude Number

1. INTRODUCTION

Research of free-surface flow (depend on the tailwater depth) under sluice gate is important to provide a prediction tool for optimize hydraulic infrastructure operation (irrigation, drainage or installation in dams). Sluice gates placement as hydraulic structure commonly in a channel used to control and rises water level. Henderson (1966) state that the discharge through a sluice gate is affected by the upstream flow depth for free flow.

Simulation operation flow under sluice gate with variation open gate will rise contraction coefficient (C_c) and discharge coefficient (C_d). Contraction coefficient (C_c) define as the ratio of water depth at vena contracta. Discharge coefficient (C_d) define as the ratio of actual discharge to the theoretical discharge. In this research, flow under sluice gate was simulated, contraction coefficient (C_c) and discharge coefficient (C_d) was analyze. Adding structure as baffle block (to reduce velocity and energy of flow, Chaudry, 2008) or sill (to increase the water level at the downstream-end of the channel, Raju, 1980) usually placement in front of sluice gate with certain distance for energy dissipator while running flow being simulation to reach the stable condition.

Benchmark value of C_c and C_d must be under 1 as a safe value for sluice gate and adding structure stabilization.

This research was development from earlier research (Sunik, 2001, 2015) and aims to analyze characteristic of C_c and C_d with two models of trapezoid baffle block ($T1$, $T2$) that located in front of sluice gate in a channel using prototype channel model test.

Some researcher as Gilles (1943), Benjamin, (1956), Betts (1978), Cheng et.al (1980), Dae-Geun (2007), Fangmeier and Strelkoff (1967), Roth and Hager (1999), Isaacs (1977), Masliyah, et. al (1985) Mohammed and Khaleel (2013), Montes (1997), Nago (1978), Noutsopoulos and Fanariotis (1978), Oskuyi and Salmasi (2011), Rajaratnam (1977), Rajaratnam and Subramanya (1967), Roth and Hager (1999), Sunik (2001, 2019), Swami (1990), Yen et. al (2001) had been done many experiment and investigated about contraction coefficient and coefficient discharge for flow under sluice gate.

Henderson (1966) derived two equations to compute C_d for each flow condition:

$$\text{Free flow} \quad C_d = \frac{C_c}{\sqrt{1+\eta}} \quad \eta = \frac{C_c x b}{y_1} \quad \dots(1)$$

The contraction coefficient is defined as the ratio of the water depth at vena contracta, y_2 to gate opening ($C_c = y_2/b$).

2. EXPERIMENTAL WORK

The experimental research was development from earlier research (Sunik, 2001, 2019). Figure 1 explained about configuration in experiment laboratory. Measurement for water depth (h) and velocity (v) implemented into 12 section in the channel in front of the sluice gate installation. Measurement for each section consist of left, middle and right part that each part measure in above, middle and bottom of height flow (one section consists of nine measured). The local velocity (v) for 12 section was measured in the same procedure. Running measurement as (1-upstream- y_1 , 2-under the gate, 3-before baffle block installation, 4-before the jump (the initial depth, y_2), 5-above the baffle block, 6-the end baffle block, 7-after the jump (sequent depth, y_3), 8-end of roller, 9-end of jump, 10-3/4 length before the sill, 11-1/2 length before the sill, 12-1/4 near the sill) for the depth (y) of water. Value of velocity and the depth affecting value of Froude number (Fr).

The prototype model as horizontal channel made from fiberglass (used for trial running flow, with dimension as width (B) = 50 cm, length (L) = 9 m). Sluice gate placed on it with dimension, width (b) = 50 cm, thick (t) = 1 cm, height (h) = 80 cm, using added device (trapezoid baffle block and sill) as energy dissipator, present in Figure 1. Simulation of flow for each run was trial until configuration of hydraulic jump was performed in stabilized to the desire location of 25 cm downstream from the sluice gate.



Fig. 1 : Trapezoid baffle block configuration in front of sluice gate

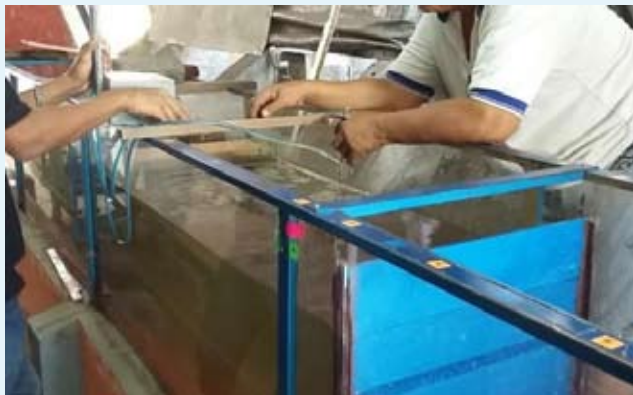


Fig. 2 : Water depth and velocity measurement for 12 section

Table 1 : Configuration dimension of trapezoid baffle block

No	Model Baffle Block	Type	Run	(b_b) mm	(l_b) mm	(h_b) mm
1	T	T1	12	7	7	7
		T2	12	14	14	14

Table 2 : Configuration dimension of sill for the channel

No	Model Baffle Block	Type	Sill type	(h_s) (cm)
1	T	T1	s_1, s_2	no sill; 2
		T2	s_2, s_3	2 and 2.7

Configuration dimension of trapezoid (T) baffle block type of T1, width (b_{b1}) = 7 mm, length (l_{b1}) = 7 mm and height (h_{b1}) = 7 mm; type of T2, width (b_{b2}) = 14 mm, length (l_{b2}) = 14 mm and height (h_{b2}) = 14 mm. Sill placed in downstream channel with dimension width (b_{s1}) = 50 cm, thick (t_s) = 1 cm, height (h_{s1}, h_{s2}, h_{s3} = no sill, 2 cm, 2.7 cm). Variation of open gate (a) = 1 cm, 2 cm, 3 cm, 4 cm.

Two set of experiments test with a total of 94 run, using trapezoid baffle block in cross sectional (three rows, each baffle block made from fiberglass) mixing with configuration of sill that placed in downstream present in Table 1 and Table 2.

Regression method (Nawari, 2007) was used to analyze relation between contraction coefficient (C_c), discharge coefficient (C_d) and Froude number (Fr) to know influence of Fr against to C_c and C_d . Determination coefficient value was criteria that showed the variable against to the response (Sembiring, 1995) as:

$$R^2 = 1 - (\Sigma JKG / \Sigma JKT) \quad \dots(2)$$

where:

ΣJKG = sum of error square

ΣJKT = total sum of squares

RESULTS AND DISCUSSION

3.1 Contraction Coefficient (C_c)

Correlation result between Froude number and contraction coefficient model T1, T2 show in Figure 3; value of C_c present in Table 3.

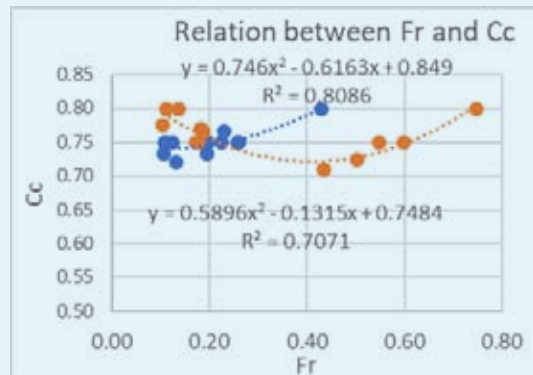


Fig. 3 : Contraction coefficient (C_c) for trapezoid baffle block model T1, T2

Table 3 : Value of Contraction Coefficient (Cc) for T1 and T2 model

No	Run	Type	Q	a	sill	Fr	Cc
1	39	T1	4.01	1	-	0.13	0.72
2	37	T1	6.86	2	-	0.13	0.75
3	35	T1	9.91	3	-	0.11	0.73
4	34	T1	14.11	3	-	0.20	0.73
5	32	T1	13.31	4	-	0.11	0.75
6	40	T1	18.03	4	-	0.11	0.75
7	42	T1	7.84	1	2.7	0.43	0.80
8	43	T1	11.51	2	2.7	0.20	0.75
9	44	T1	12.27	2	2.7	0.26	0.75
10	45	T1	16.31	3	2.7	0.23	0.77
11	46	T1	18.03	4	2.7	0.23	0.75
12	47	T1	20.71	4	2.7	0.26	0.75

No	Run	Type	Q	a	sill	Fr	Cc
1	72	T2	4.66	1	-	0.18	0.75
2	73	T2	4.76	1	-	0.18	0.77
3	79	T2	12.79	4	-	0.11	0.78
4	80	T2	14.51	4	-	0.11	0.80
5	91	T2	7.73	1	2	0.75	0.80
6	88	T2	12.27	2	2	0.43	0.71
7	87	T2	15.47	3	2	0.14	0.80
8	86	T2	16.03	3	2	0.19	0.77
9	85	T2	15.47	4	2	0.17	0.75
10	92	T2	8.85	1	2.7	0.60	0.75
11	93	T2	13.57	2	2.7	0.50	0.73
12	94	T2	17.88	2	2.7	0.55	0.75

Based on R² value that close to 1 for determination coefficient, the better performance showed by trapezoid baffle block type T2 that used no sill, sill = 2 cm and sill = 2.7 cm at the channel, with Fr = 0.11 - 0.75, Cc = 0.73 – 0.80. In all type combination of trapezoid baffle block with sill, the value of Cc was below 1 while benchmark usually for free flow was based on the conformal mapping method ($\pi/(\pi+2)$) \approx 0.611 (in Belaud, 2009), it means the series dan rows of baffle block that installed affected the Cc value going to increased and strong relation between value Fr to contraction coefficient had present (value of Cc influenced by Fr, while Fr depend on velocity (v) and depth of water (y)). The equation presented as:

$$y = 0.746x^2 - 0.6163x + 0.849, \quad R^2 \text{ value} = 0.8086$$

Adding device i.e sill at the channel influenced velocity of flow, affected to Cc value. All value of Cc under 1 as benchmark mean that configuration of trapezoid baffle block T2 model safe for implementation.

Value Cc reach 0.80 in combination a = 1 cm and sill = 2.7 cm (T1) and a = 4 cm, no sill; a = 1, sill = 2 cm; a = 3, sill = 2 cm (T2) with value for Fr in range 0.1 – 0.75 (sub critic).

3.2 Discharge Coefficient (Cd)

Correlation result between Froude number and discharge coefficient model T1, T2 show in Figure 4; value of Cd present in Table 4.

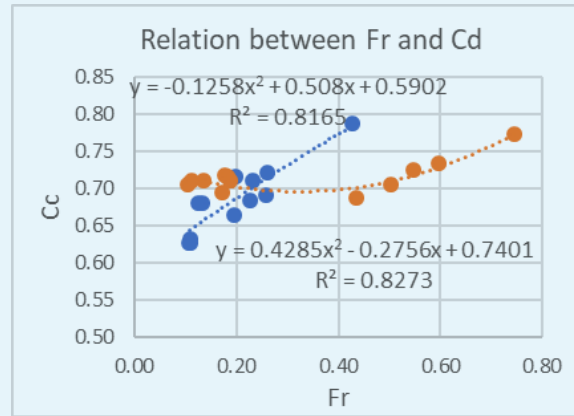


Fig. 4 : Discharge coefficient (Cd) for trapezoid baffle block model T1, T2

Table 4 : Value of Discharge Coefficient (Cd) for T1 and T2 model

No	Run	Type	Q	a	sill	Fr	Cd
1	39	T1	4.01	1	-	0.13	0.68
2	37	T1	6.86	2	-	0.13	0.68
3	35	T1	9.91	3	-	0.11	0.63
4	34	T1	14.11	3	-	0.20	0.66
5	32	T1	13.31	4	-	0.11	0.63
6	40	T1	18.03	4	-	0.11	0.63
7	42	T1	7.84	1	2.7	0.43	0.79
8	43	T1	11.51	2	2.7	0.20	0.72
9	44	T1	12.27	2	2.7	0.26	0.72
10	45	T1	16.31	3	2.7	0.23	0.71
11	46	T1	18.03	4	2.7	0.23	0.68
12	47	T1	20.71	4	2.7	0.26	0.69

No	Run	Type	Q	a	sill	Fr	Cd
1	72	T2	4.66	1	-	0.18	0.72
2	73	T2	4.76	1	-	0.18	0.72
3	79	T2	12.79	4	-	0.11	0.71
4	80	T2	14.51	4	-	0.11	0.71
5	91	T2	7.73	1	2	0.75	0.77
6	88	T2	12.27	2	2	0.43	0.69
7	87	T2	15.47	3	2	0.14	0.71
8	86	T2	16.03	3	2	0.19	0.71
9	85	T2	15.47	4	2	0.17	0.69
10	92	T2	8.85	1	2.7	0.60	0.73
11	93	T2	13.57	2	2.7	0.50	0.70
12	94	T2	17.88	2	2.7	0.55	0.72

Based on R^2 value, the better performance showed by trapezoid baffle block type T2 that used no sill, sill = 2 cm and sill = 2.7 cm at the channel, with $Fr = 0.11 - 0.75$, $Cd = 0.69 - 0.77$, describe as:

$$y = 0.4285x^2 - 0.2756x + 0.7401, R^2 \text{ value} = 0.8273$$

The value R^2 close to 1 for determination coefficient. It means that a strong relation between value Fr to discharge coefficient had present (value of Cd influenced by Cc). All benchmark value under 1, it means that configuration of trapezoid baffle block T2 safe for implementation.

While open gate being increase, Fr value tend to decrease and Cc value tend to stabilize. The velocity value affected the Fr value. While the velocity flow held by baffle block, it will decrease so the Fr value became decrease too.

CONCLUSION

Configuration of baffle block (depend on number of baffle blocks, spacing between adjacent blocks, width of the block, dimension of block) paired with matched sill placement will gave better performance of Cc and Cd (< 1) while sluice gate operated with variation open gate.

It concluded that trapezoid baffle block model T2 (1.4 cm) combine with no sill and two model of sill (2 and 2.7 cm) gave better performance for Cc and Cd value (determination coefficient $R^2 = 0.8086$ and $R^2 = 0.8273$) than model T1.

REFERENCES

- Benjamin, T.B. 1956. On the Flow in Channels When Rigid Obstacles are Placed in the Stream. *Journal Fluid Mechanic*, Vol. 1, pp. 227-248.
- Betts, P. L. 1978. Discussion of Numerical Solution for Flow Under Sluice Gates. *Journal of the Hydraulics Division*, Vol. 104, No. 2, pp. 313-315.
- Cheng, A. H. D., Liggett, J. A., and Liu, P. L.-F. 1980. Boundary Calculations of Sluice and Spillway Flows. *Journal of the Hydraulics Division*, Vol. 107, No. 10, pp. 1163- 1178.
- Dae-Geun, Kim. 2007. Numerical Analysis of Free Flow Past a Sluice Gate. *Journal of Civil Engineering*. Vol. 11, No. 2. pp. 127-132.
- Fangmeier, D. D. and Strelkoff, T. S. 1967. Solution for Gravity Flow Under a Sluice Gate. *Journal of the Engineering Mechanics Division*, Vol. 94, No. 2, pp. 153-176.
- Gilles, Belaud. 1943. Calculation of Contraction Coefficient Under Sluice Gate and Application to Discharge Measurement. *Journal of Hydraulic Engineering (ASCE)*, 135 (12): 1086-1091.
- Henderson, F.M. 1966. *Open Channel Flow*. MacMillan.
- Isaacs, L. T..1977. Numerical Solution for Flow under Sluice Gates. *Journal of the Hydraulics Division*, Vol. 103, No. 5, pp. 473- 481.
- K.G. Ranga Raju, M.K. Kitaal, M.S.Verma & V.R. Ganeshan,, 1980. Analysis of Flow Over Baffle Blocks and End Sills, *Journal of Hydraulic Research*, Vol. 18, Issue 3, pp. 227-241.
- Masliyah, J. H., Nandakuma, K., Hemphill, F., and Fung, L.1985. Body-Fitted Coordinates for Flow Under Sluice Gates. *Journal of the Hydraulics Division*, Vol. 111, No. 6, pp. 922-933.
- Mohammed, Ahmed Y., Khaleel, Moayed S. 2013. Gate Lip Hydraulics Under Sluice Gate. *Journal of Scientific Research*, Vol. 2, pp. 16-19.
- Montes, J. S. 1997. Irrotational Flow and Real Fluid Effects under Planar Sluice Gates. *Journal of the Hydraulics Division*, Vol. 123, No. 3, pp. 219-232.
- M. Hanif, Chaudhry. 2008. *Open Channel Flow*. Second Edition, University of South Carolina, Springer.
- Nago, H. 1978. Influence of Gate Shapes on Discharge Coefficients. *Proceedings of Japan Society of Civil Engineers*, pp. 59-71.
- Nawari. 2007. *Regression Analysis using MS Excel and SPSS*. PT Elex Media Komputindo. Jakarta.
- Noutsopoulos, G. K. and Fanariotis S. 1978. Discussion of Free Flow Immediately Below Sluice Gates. *Journal of the Hydraulics Division*, Vol. 104, No. 3, pp. 451-455.
- Oskuyi, Navid Nasehi and Salmasi,,Farzin. 2011. Vertical Sluice Gate Discharge Coefficient. *Journal of Civil Engineering and Urbanism*, Volume 2, Issue 3, pp.108-114.
- Rajaratnam, N. and Subramanya, K. 1967. Flow Equation for the Sluice Gate. *Journal of Irrigation and Drainage Engineering*, Vol. 93, No. 9, pp. 167-186.
- Rajaratnam, N.1977. Free Flow Immediately Below Sluice Gates. *Journal of the Hydraulics Division*, Vol. 103, No. 4, pp. 345-351.
- Roth, A. and Hager, W.H. 1999. Underflow of Standard Sluice Gate. *Experiments in Fluids*, Vol. 27, pp. 339-350.
- Sembiring. 1995. *Regression Analysis*. ITB, Bandung.
- Sunik. 2001. *Simulation Operation Sluice Gate for Secondary Channel Using Model Test Physic*, Master Thesis, Brawijaya University.
- Sunik. 2019. Modelling Equation of Contraction Coefficient (Cc) and Discharge Coefficient (Cd) for Flow under Sluice Gate Using Cubic Baffle Block and Sill. *International Journal of Applied Engineering Research* Vol.14, Issue 14, pp. 3155-3158
- Swami, P. K. 1990. Sluice Gate Discharge Equation. *Journal Irrigation and Drainage Engineering (ASCE)*, 118(1): 5660.
- Yen, J.F., C.H. Lin and C.T. Tsai. 2001. Hydraulic Characteristics and Discharge Control of Sluice Gates. *J. Chinese Inst. Eng.*, 24(3): 301-310.